


Features

- Recess or surface mount
- Mirrored doors and interior
- 3-way adjustable concealed hinge system
- SAFESEAL® gasket frame
- Rust-free aluminum construction
- Can be installed as a left- or right-hand door swing
- Three adjustable 1/4" (6 mm) glass shelves
- 23-1/4" (59.1 cm) W x 30" (76.2 cm) H x 4-5/8" (11.7 cm) D

PLM2430W

ALSO PLM2430B, PLM2430WB,
PLM2430BB

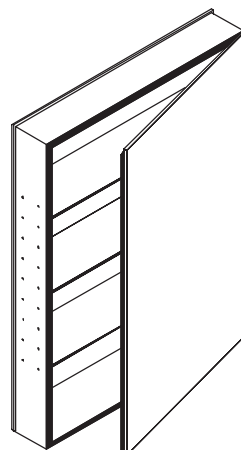

Codes/Standards Applicable

Specified model meets or exceeds the following:

- None applicable

Specified Model

Model	Description	
PLM2430W	Plain edge, white interior	☐
PLM2430B	Plain edge, black interior	☐
PLM2430WB	Beveled edge, white interior	☐
PLM2430BB	Beveled edge, black interior	☐

NOTE: Additional hardware is required for installing cabinets side-by-side.

Required Accessories - For Surface Mount Installations Only

M30SKD4A	Aluminum side kit	☐
PLSK30D4	Mirrored side kit	☐

Refer to the Price Guide for additional side kit colors and finishes.

Optional Accessories

SLB24D4	Safety-lock box	☐
SOMM	Black swing-out magnifying mirror	☐
PLGKIT	PL ganging kit - hardware required for installing 2 or 3 cabinets side-by-side	☐

Light options and additional accessories are available. Refer to the Price Guide for more information.

PL SERIES FLAT DOOR CABINET

Technical Information

Roughing-in opening	22-1/2" (57.2 cm) W x 29-1/4" (74.3 cm) H x 4" (10.2 cm) D
Door opening angle	170°

Installation Notes


Install this product according to the installation guide.

When determining the height of the mirrored cabinet, ensure the mirrored door will clear all obstacles, such as a faucet. A minimum distance of 1" (2.5 cm) is required.

Secure the screws (provided) to a stud to avoid possible property and product damage. If this is not possible, anchors (provided) must be inserted before installing the screws.

Modular components can be joined horizontally and vertically. When ganging cabinets: rough opening width/height = total width/height of all cabinets and lights minus 3/4" (1.9 cm).

Recessed cabinets project 7/8" (2.2 cm) from wall.

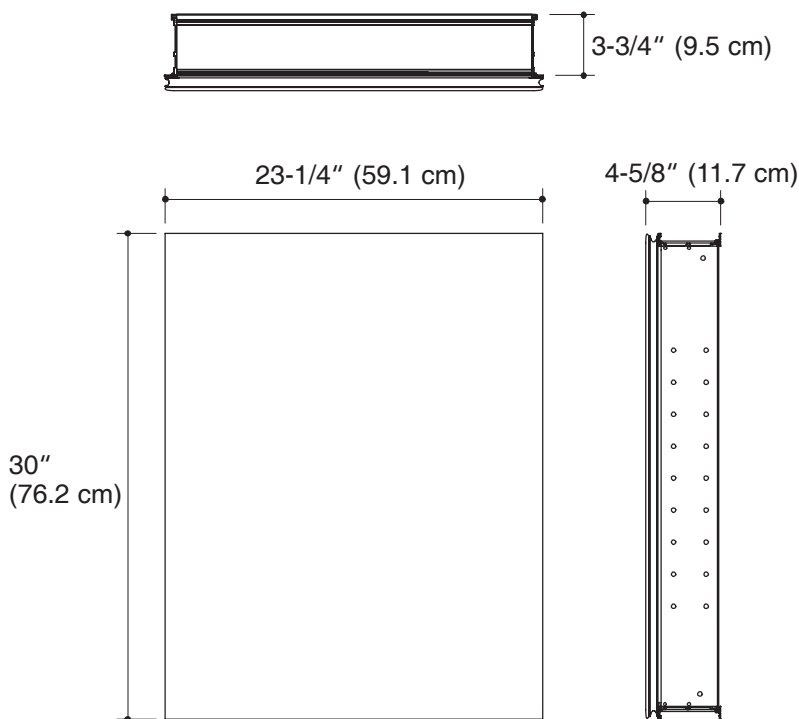


Product Diagram

Features

- Recess or surface mount
- Mirrored doors and interior
- 3-way adjustable concealed hinge system
- SAFESEAL® gasket frame
- Rust-free aluminum construction
- Can be installed as a left- or right-hand door swing
- Three adjustable 1/4" (6 mm) glass shelves
- 19-1/4" (48.9 cm) W x 30" (76.2 cm) H x 4-5/8" (11.7 cm) D

PLM2030W

ALSO PLM2030B, PLM2030WB,
PLM2030BB

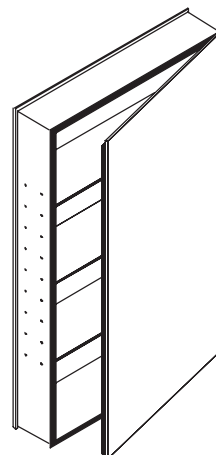

Codes/Standards Applicable

Specified model meets or exceeds the following:

- None applicable

Specified Model

Model	Description	
PLM2030W	Plain edge, white interior	☐
PLM2030B	Plain edge, black interior	☐
PLM2030WB	Beveled edge, white interior	☐
PLM2030BB	Beveled edge, black interior	☐
NOTE: Additional hardware is required for installing cabinets side-by-side.		

Required Accessories - For Surface Mount Installations Only

M30SKD4A	Aluminum side kit	☐
PLSK30D4	Mirrored side kit	☐
Refer to the Price Guide for additional side kit colors and finishes.		

Optional Accessories

SLB20D4	Safety-lock box	☐
SOMM	Black swing-out magnifying mirror	☐
PLGKIT	PL ganging kit - hardware required for installing 2 or 3 cabinets side-by-side	☐
Light options and additional accessories are available. Refer to the Price Guide for more information.		

PL SERIES FLAT DOOR CABINET

Technical Information

Roughing-in opening	18-1/2" (47 cm) W x 29-1/4" (74.3 cm) H x 4" (10.2 cm) D
Door opening angle	170°

Installation Notes


Install this product according to the installation guide.

When determining the height of the mirrored cabinet, ensure the mirrored door will clear all obstacles, such as a faucet. A minimum distance of 1" (2.5 cm) is required.

Secure the screws (provided) to a stud to avoid possible property and product damage. If this is not possible, anchors (provided) must be inserted before installing the screws.

Modular components can be joined horizontally and vertically. When ganging cabinets: rough opening width/height = total width/height of all cabinets and lights minus 3/4" (1.9 cm).

Recessed cabinets project 7/8" (2.2 cm) from wall.

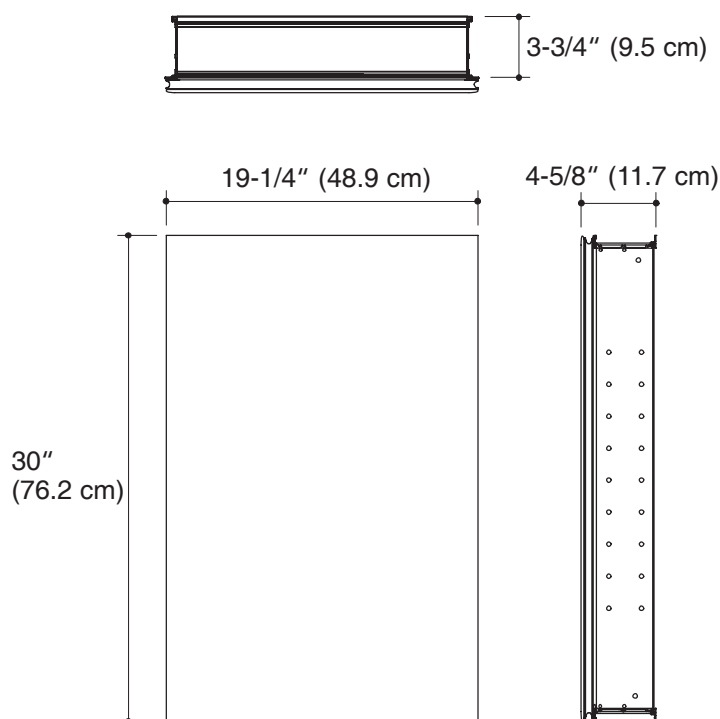

Product Diagram



PL SERIES FLAT DOOR CABINET

Features

- Recess or surface mount
- Mirrored doors and interior
- 3-way adjustable concealed hinge system
- SAFESEAL® gasket frame
- Rust-free aluminum construction
- Can be installed as a left- or right-hand door swing
- Three adjustable 1/4" (6 mm) glass shelves
- 15-1/4" (38.7 cm) W x 30" (76.2 cm) H x 4-5/8" (11.7 cm) D


Codes/Standards Applicable

Specified model meets or exceeds the following:

- None applicable

PLM1630W

ALSO PLM1630B, PLM1630WB,
PLM1630BB

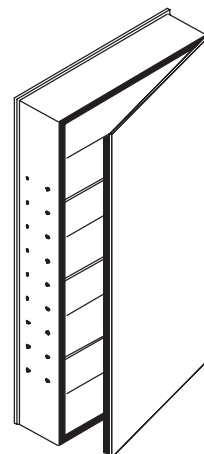

Specified Model

Model	Description	
PLM1630W	Plain edge, white interior	☐
PLM1630B	Plain edge, black interior	☐
PLM1630WB	Beveled edge, white interior	☐
PLM1630BB	Beveled edge, black interior	☐

NOTE: Additional hardware is required for installing cabinets side-by-side.

Required Accessories - For Surface Mount Installations Only

M30SKD4A	Aluminum side kit	☐
PLSK30D4	Mirrored side kit	☐

Refer to the Price Guide for additional side kit colors and finishes.

Optional Accessories

SLB16D4	Safety-lock box	☐
SOMM	Black swing-out magnifying mirror	☐
PLGKIT	PL ganging kit - hardware required for installing 2 or 3 cabinets side-by-side	☐

Light options and additional accessories are available. Refer to the Price Guide for more information.

PL SERIES FLAT DOOR CABINET

Technical Information

Roughing-in opening	14-1/2" (36.8 cm) W x 29-1/4" (74.3 cm) H x 4" (10.2 cm) D
Door opening angle	170°

Installation Notes


Install this product according to the installation guide.

When determining the height of the mirrored cabinet, ensure the mirrored door will clear all obstacles, such as a faucet. A minimum distance of 1" (2.5 cm) is required.

Secure the screws (provided) to a stud to avoid possible property and product damage. If this is not possible, anchors (provided) must be inserted before installing the screws.

Modular components can be joined horizontally and vertically. When ganging cabinets: rough opening width/height = total width/height of all cabinets and lights minus 3/4" (1.9 cm).

Recessed cabinets project 7/8" (2.2 cm) from wall.

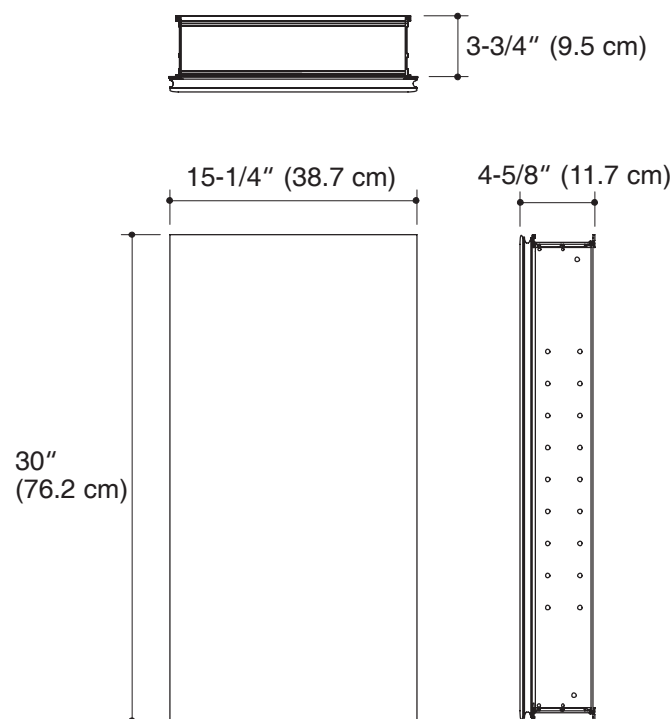

Product Diagram