


SERENITY™ LIGHTED MIRROR

Hospitality Performance Specification

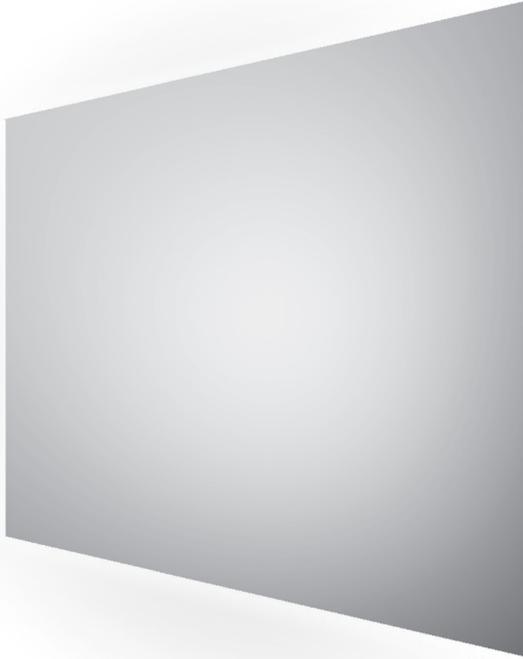

The Serenity™ Lighted Mirror is a classic and elegant fixture featuring ethereal light glowing from within the wall.

FEATURES

- Elife™-8 Years extended lamp replacement cycle
- HardCoat™ anti-corrosion mirror treatment
- Environmentally sustainable and energy efficient
- Proudly Built with American Pride

LIGHTING

- Sylvania Low-Mercury T5HO fluorescent (US Made)
- CRI 85
- CCT (K) 3000
- Average lamp life of 35,000 hours
- Sylvania 50,000 cycle ballast
- Without side diffusers, lamps may be seen from side of mirror

OPTIONS

- Dimmable - Separate wall control required
- Defogger
- Night Light
- Add TV (See Serenity™ Lighted Mirror TV)
- Custom Sizes
- Glass Shelf
- LED Digital Clock
- LED Lighting
- Side Diffuser Kit

SAFETY

- Tested to UL/UL-C 1598 including section 16.23 (adhesive support test)
- International Certifications
- Safety backed mirror

THERE'S ONLY ONE™ ELECTRIC MIRROR®

Electric Mirror is the global leader in Lighted Mirrors and Mirror TV technology. With unparalleled customer service and amazing innovation, Electric Mirror is the standard of luxury for five-star hotels, upscale commercial projects and designer homes.


SERENITY™ LIGHTED MIRROR

Hospitality Performance Specification

SPECIFICATION

- Electrical connections made with MC cable brought through the chassis knockout, no electrical box required.
- Electrical power should be controlled by a light switch.
- Fixture should be mounted to wall studs to provide sufficient support. Mounting holes are provided in the chassis.

MODEL NUMBER	DIMENSIONS	POWER REQUIREMENTS	LAMPING
SER-30.00x30.00	30" W x 30" H x 3" D 762mm x 762mm x 76.2mm	120 - 277 VAC, .80 - .35 Amps, 96W	4 x T5HO, 24W
SER-30.00x42.00	30" W x 42" H x 3" D 762mm x 1067mm x 76.2mm	120 - 277 VAC, 1.05 - .45 Amps, 126W	4 x T5HO, 24/39W
SER-42.00x42.00	42" W x 42" H x 3" D 1067mm x 1067mm x 76.2mm	120 - 277 VAC, 1.3 - .56 Amps, 156W	4 x T5HO, 39W
SER-54.00x42.00	54" W x 42" H x 3" D 1372mm x 1067mm x 76.2mm	120 - 277 VAC, 1.55 - .67 Amps, 186W	4 x T5HO, 39/54W
SER-66.00x42.00	66" W x 42" H x 3" D 1676mm x 1067mm x 76.2mm	120 - 277 VAC, 1.98 - .85 Amps, 238W	4 x T5HO, 39/80W

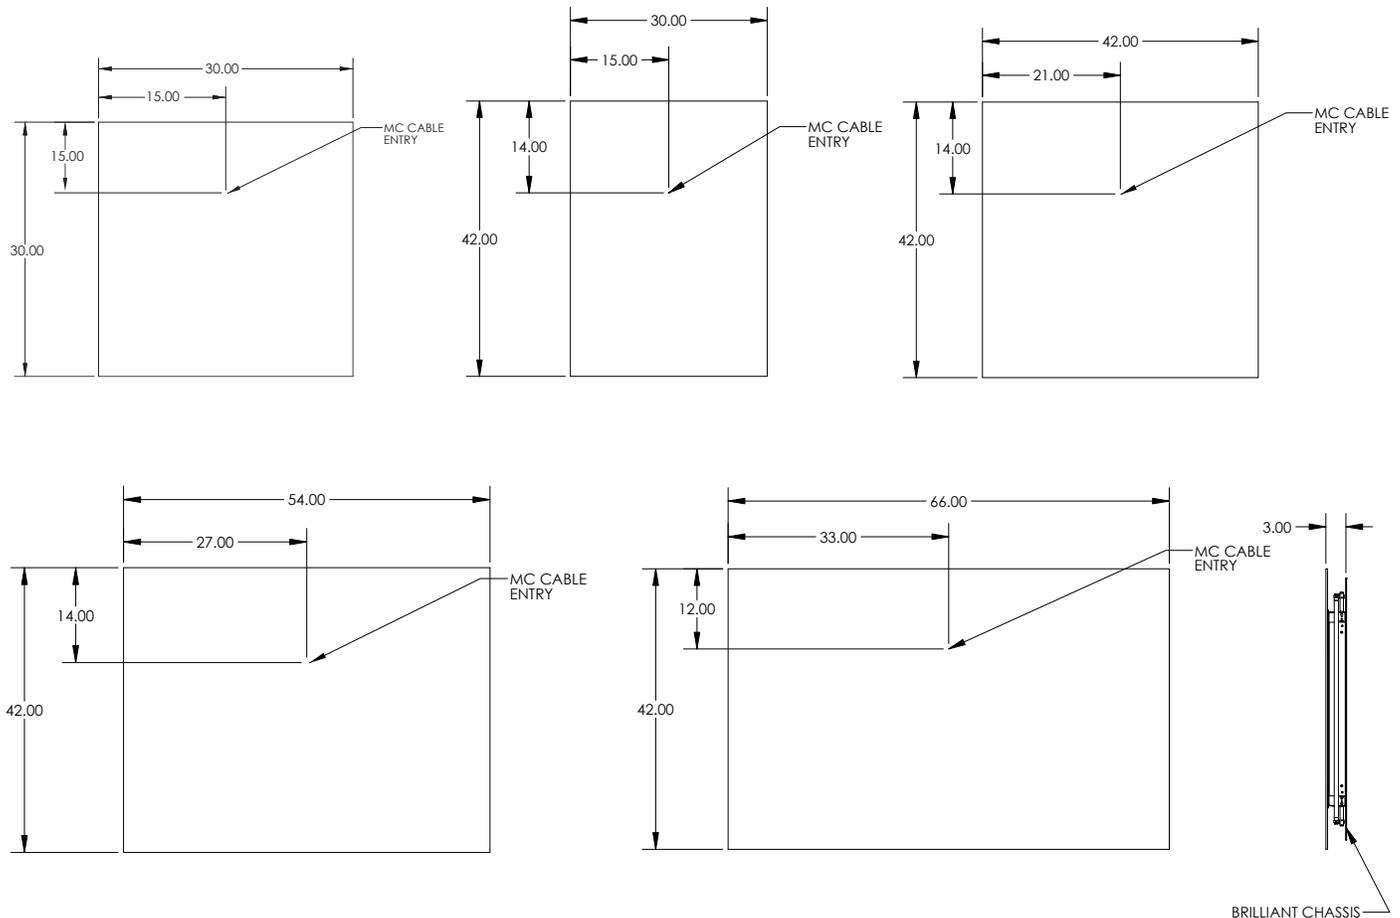

PROPRIETARY AND CONFIDENTIAL: The information contained in this specification is the sole property of Electric Mirror®. Any reproduction in part or in whole without written permission from Electric Mirror® is prohibited.

© 2016 ELECTRIC MIRROR®



Keen™ Technology is an energy-saving, environmentally-friendly Lighted Mirror with a dimming touchpad. Three capacitive touch buttons embedded into the face of the mirror give the user full control over eight light dimming settings, including a Nightlight setting. Keen™ has an intelligent sensor that allows the mirror to automatically dim after being on for one hour.

ATTENTION: THIS PRODUCT MUST BE CONNECTED TO EARTH GROUND IN ACCORDANCE WITH NEC CODE 250.20 (B). IMPROPER GROUND CAN RESULT IN IRREGULAR FUNCTION OF THE UNIT.

THERE'S ONLY ONE ELECTRIC MIRROR®

Electric Mirror is the global leader in Lighted Mirrors and Mirror TV™ Technology. With unparalleled customer service and amazing innovation, Electric Mirror is the standard of luxury for Five-Star hotels, upscale commercial projects, and designer homes.

keen

TECHNOLOGY

Energy Savings With A Touch

FEATURES

- 8 Levels of Brightness for Lighting
- Integrated Nightlight
- Automatic dimming to 40% lighting power after one hour of use
- Integrated capacitive touch controls
- No need for extra wiring, all wiring is internal of the unit.
- No need for dimming wall switch
- Patent-pending

BACKLIT TOUCH CONTROL

- Power On/Off
- Nightlight
- Brightness Up/Down

POWER OPTIONS

- Choose to have Power button included in capacitive touch buttons (3 or 4). Power button gives functionality to turn all lights off in addition to wall switch.
- Estimated to reduce annual energy costs to Lighted Mirror by 60% due to auto-dimming

LIGHTING OPTIONS

- Works seamlessly with either LED or fluorescent lamps



NIGHTLIGHT

The Nightlight function turns the lights to a low setting

LIGHT UP/DOWN

Turn the light intensity up or down to the user's desire